


Three phase transformer 25 kVA

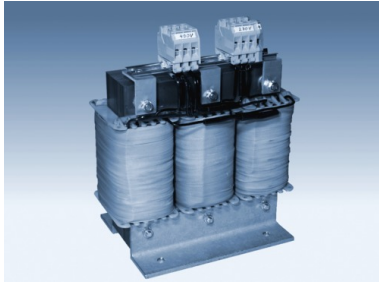

Three phase transformer 25 kVA, in-/output voltages according to customer's specifications, e.g. 690 V, 500 V, 480 V, 400 V, 230 V, 208 V, 200 V, 120 V, 110 V. Voltages from 10 V to 1000 V possible. Optionally with housing IP23 or IP54 (higher IP rating on request)

(Photo shows similar transformer but with different power)

| | |
|------------------------|---|
| Type-no. | DTT250 |
| Type | Isolating transformer |
| Voltage | e.g. 690 V, 500 V, 480 V, 400 V, 380 V, 230 V, 208 V, 200 V, 120 V, 110 V |
| Power | 25000 VA |
| Input | Terminal clamps |
| Output | Terminal clamps |
| Size / weight | approx. 490 x 285 x 530 mm / approx. 160.0 kg |
| Approvals |  |
| Origin | Made in Germany |
| Standard delivery time | 2-3 weeks |

Measures and weight are non-binding example values. Final values after concrete calculation of the transformer